


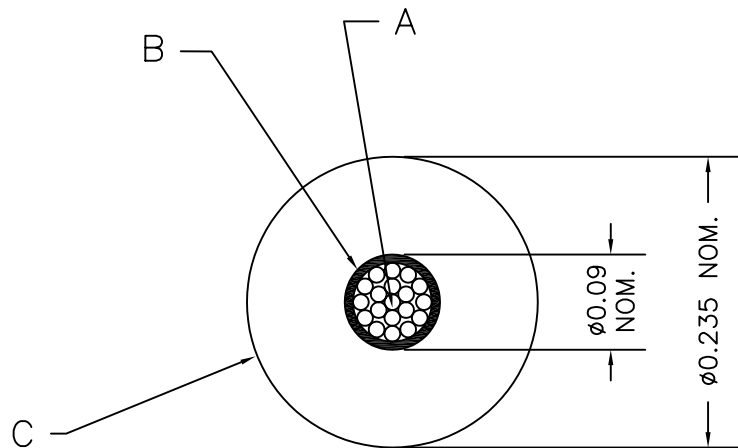

LEGEND

A. CONDUCTOR – #18AWG (19 X #30AWG) SILVER PLATED COPPER

B. STRAND SHIELD – CONDUCTIVE SILICONE RUBBER, BLACK

E. INSULATION – SILICONE RUBBER, WHITE TO $\phi 0.235 \pm 0.015$

RATING: 15 KVAC, RMS, 60 HZ
40 KVDC

REVISIONS

THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE THE PROPERTY OF DIELECTRIC SCIENCES, INC AND SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF APPARATUS WITHOUT PERMISSION.

REV	ECO NUMBER	APPD	DATE	UNLESS OTHERWISE SPECIFIED		DRAWN O.ABDULKY	DATE 28SEP05	DIELECTRIC SCIENCES,INC CHELMSFORD, MASSACHUSETTS 01824			
—	RELEASE DRAWING			DIMENSIONS ARE IN INCHES TOLERANCE ON DECIMALS .XX ±.01 .XXX ±.005		CHECKED	DATE				
						APPROVED		DATE	CABLE: HV: 18AWG, 40KVDC		
				ANGLES ±		MATERIAL					
				CONCENTRICITY .005 TIR REMOVE BURRS & SHARP EDGES ALL MACHINE SURFACES 125✓		FINISH		SIZE	FSCM NO.	DWG NO.	REV
								A	50509	2012	
				 		SCALE		SHEET		1 OF 1	