

CRT-Base Connectors

Base connections without

 Right-angle and straight connections available
 One-piece molded construction

Environmentally sealed for trouble-free performance
 Operates at rated DC voltages at 70,000 ft. [21,336 m]
 Operating temperature range: -67°F to +257°F [-55°C to +125°C]
 Withstands shock tests per MIL-STD-202, Test Method

102, Condition C
Excellent system serviceability
High reliability
Fully tested harnesses
Lower applied cost

Product Facts

potting

LGH High Voltage Connectors



Various Specials (Continued)



AMP molded silicone rubber CRT-base connectors are designed to better eliminate the hand wiring approach for CRT-base connections. These connectors offer greater system serviceability and feature highly reliable performance with complete versatility. They have integrally molded high and low voltage leads, as dictated by particular applications, and a molded boot design which promotes dust and moisture resistance over a long operational life span.

The versatility of the connector design allows customers to purchase either fully wired connectors, or connectors which can be terminated and potted at their plant. Currently, LGH molded silicone rubber CRTbase connectors are available for a variety of standard 9, 12 and 14 pin tubes. Options include a choice of wire, both low and high voltage, as well as the direction of wire exiting from the connector. Each harness is fully tested prior to shipment.

In addition to the connectors listed here, Tyco Electronics can furnish a wide variety of CRT-base connectors. Consult Tyco Electronics for details.

Catalog 1308940 Revised 8-06

www.tycoelectronics.com

Dimensions are in inches and millimeters unless otherwise specified. Values in brackets are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change. USA: 1-800-522-6752 Canada: 1-905-470-4425 Mexico: 52-55-1106-0800 C. America: 57-1-254-4444 South America: 55-11-2103-6000 Hong Kong: 852-2735-1628 Japan: 81-44-844-8013 UK: 44-208-420-8341


6-59




LGH High Voltage Connectors




Various Specials (Continued)



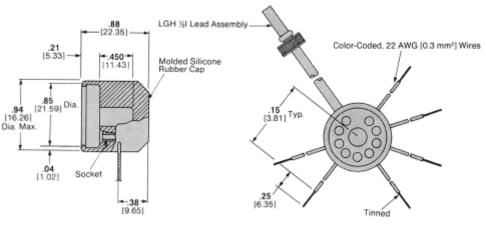


Part Number 862481-1

This connector is one of many available from Tyco Electronics for mating with standard JEDEC tube base E9-37.

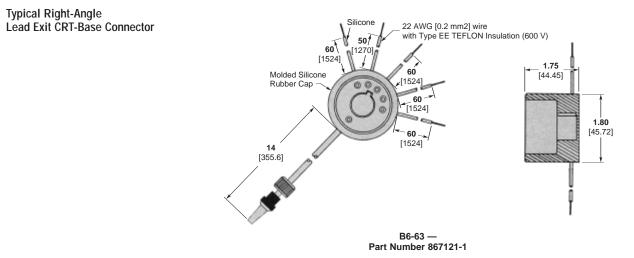



11 Position CRT-Base Connector



Part Number 443118-2

TEFLON is a trademark of E. I. DuPont de Nemours and Company.

6-60

Catalog 1308940 Revised 8-06

Dimensions are in inches and millimeters unless otherwise specified. Values in brackets www.tycoelectronics.com are metric equivalents.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752 Canada: 1-905-470-4425 Mexico: 52-55-1106-0800 C. America: 57-1-254-4444

Consult Tyco Electronics for details.

This connector is one of several available from Tyco Electronics for mating

with standard JEDEC tube base B9-290. In addition to the connectors listed here, Tyco Electronics can furnish a wide variety of CRT-base connectors.

> South America: 55-11-2103-6000 Hong Kong: 852-2735-1628 Japan: 81-44-844-8013 UK: 44-208-420-8341